


Broaching Standoffs

TR-KFE/TR-KFSE

Electro Tin Plated Steel : TR-KFE | Stainless Steel : TR-KFSE

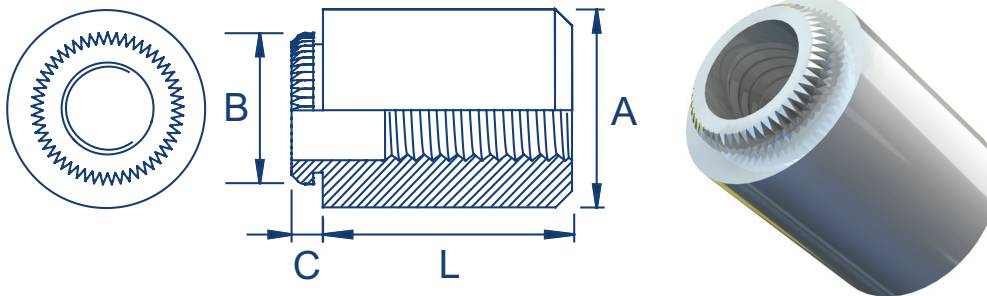

Metric Dimensions - Length to suit customer requirements

Thread or thru hole size	M2.5	M3	M4	3.6	4.2
C Max	1.53	1.53	1.53	1.53	1.53
B	4.68	4.68	6.75	5.87	6.86
A	5.56	5.56	8.74	7.14	8.74
Min rec sheet thickness	1.53	1.53	1.53	1.53	1.53
Hole size +0.08 -0.00	4.22	4.22	6.4	5.4	6.4
Min distance to edge of sheet	4.4	4.4	6.4	5.5	7

Preferred Range

Thread	Thru hole +0.10 -0.08	Length ± 0.13							
		3	4	5	6	8	10	12	14
M3	(3)	•	•	•	•	•	•	•	•
M3	3.6	•	•	•	•	•	•	•	•
M3	4.2	•	•	•	•	•	•	•	•

Metric Performance Data: TR-KFE / TR-KFSE

Thread	M2	M3 0.5	M4	3.6	4.2
Test sheet FR4 fiberglass	1.5mm	1.5mm	1.5mm	1.5mm	1.5mm
Installation (kN)	2.2	2.2	2.2	2.2	2.2
Torsional resistance (Nm)	1.36	1.36	3	-	-
Pushout (N)	290	290	400	330	420

These tests have been conducted in laboratory conditions, these figures should therefore be used for guidance only.

All data is correct to the best of our knowledge, however TR cannot be held responsible for any errors or omissions.