


# Pin Lock Panel Fasteners

TR-PTL2/\*TR-PSL2



Zinc Plated Steel : TR-PTL2 | \*TR-PSL2

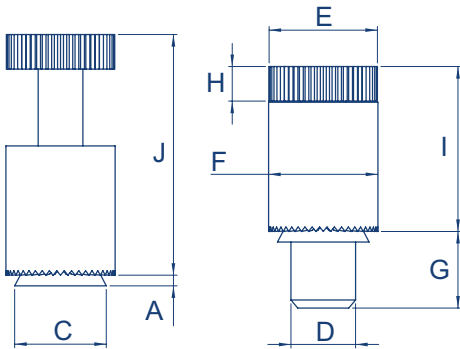

## Metric Dimensions

Type	TR-PTL2	TR-PSL2
Plunger diameter code	04	04
Plunger length code	4	4
A (shank) max	1.47	1.47
Min sheet thickness	1.53	1.53
Hole in sheet +0.08	8.33	8.33
C max	8.31	8.31
D -0.13	6.35	6.35
E ±0.25	12.7	12.7
F ±0.25	10.3	10.3
G ±0.25	7.87	7.87
H ±0.25	4.32	4.32
I ±0.25	15.11	12.95
J Nom	22.73	19.81
Min dist hole C/L to edge	8.64	8.64

## Metric Performance Data: TR-PTL2 / \*TR-PSL2

Aluminium		Cold Rolled Steel	
Installation Kn	Pushout (N)	Installation Kn	Pushout (N)
13.3	1779	17.8	2224

\*TR-PSL2 available on request

These tests have been conducted in laboratory conditions, these figures should therefore be used for guidance only.

All data is correct to the best of our knowledge, however TR cannot be held responsible for any errors or omissions.